



Series 92 Electric Actuators


Standard Features (Sizes 1/2" - 4")

- Brushless, capacitor-run motors (AC models)
- Integral thermal overload protection with auto-reset (AC models)
- Permanently lubricated gear train
- Duty cycle 100% for high cycle applications
- Combination NEMA 4X, 7 and 9 enclosure with thermally bonded epoxy powder coating with stainless steel trim
- ISO bolt circle
- Two 1/2" NPT conduit ports prevent interference between control and power signals
- Declutchable manual override
- Standard travel-stop limit switches can simultaneously be used for indicator lights
- Highly visible position indicator

Options

- Extra limit switches
- Feedback potentiometer
- Heater and thermostat (to -40° F)
- Positioner: 4-20mA or 0-10Vdc input
- 4-20 mA output position transmitter
- Voltages: 220 Vac, 24 Vac, 12 Vac, 24 Vdc, 12 Vdc
- Mechanical brake eliminates seating oscillation
- Bus systems - Consult factory

AC Wiring (For 115 Vac and 220 Vac only)

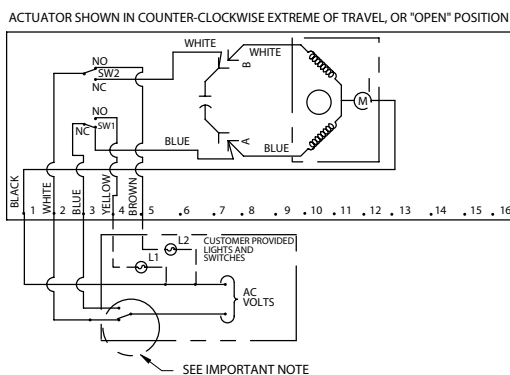


Electric Actuators

Specifications

Series 92: Motor Type - Reversing, 1/4 turn single phase
 Sizes - S92, A92 for sizes 1/2" - 4" ball valves
 Torque - 400 to 700 in-lbs
 Voltage - 120 Vac, 50/60 Hz
 Amp Draw - For S92: .5 Amps
 For A92: .75 Amps
 Max Ambient Temp - 150° F
 Switches - Two single pole, double throw (15 Amp rating)

SERIES 92 ON TYPE 21 BALL VALVES

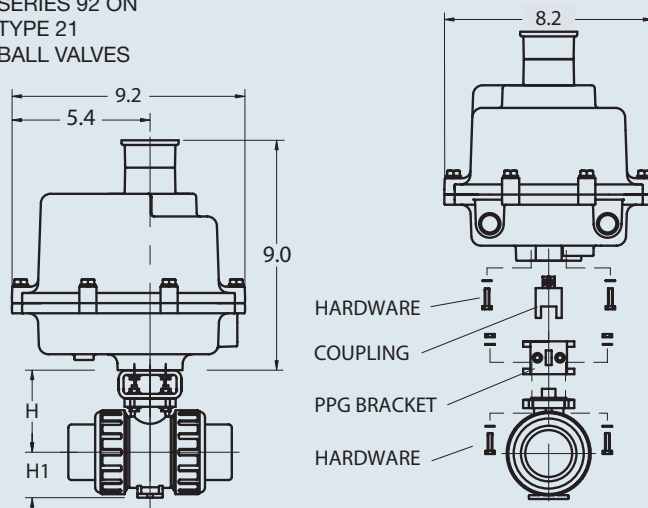

Engineering Data

Actuator Model	Torque (in-lbs)	Duty Cycle	Cycle Time (sec)	Weight (lbs)	Amp Draw					
					115 Vac	220 Vac	24 Vac	12 Vac	24 Vdc	12 Vdc
S92	400	100	10	10.0	0.50	0.8	3.0	2.0	4.0	2.0
A92	700	75	10	10.0	0.75	0.8	3.0	2.0	4.0	2.0

Duty cycle shown above is for 115 Vac at ambient temperature.

NOTE TO WIRING DIAGRAM:

1. EACH ACTUATOR MUST BE POWERED THROUGH ITS OWN INDIVIDUAL SWITCH CONTACTS TO AVOID CROSS FEED.
2. WIRING AS SHOWN IS FOR S92 AND A92 MOTOR. LEADS AT "A" AND "B" ARE REVERSIBLE FOR B92 AND C92.
3. MOTOR HAS A THERMAL PROTECTOR AS SHOWN BY (M) IN DIAGRAM. (115 AND 220 VAC MODEL).
4. IF 115 & 220 VAC MODELS ARE PLC DRIVEN, OUTPUT CONTACTS OF PLC SHOULD BE RATED AT A MINIMUM OF 1.5 TIMES REQUIRED INPUT VOLTAGE OF ACTUATOR.

Dimensions

NOMINAL SIZE		H	H1
INCHES	mm		
1/2	15	2.76	1.14
3/4	20	3.01	1.38
1	25	3.29	1.54
1 1/4	30	3.64	1.85
1 1/2	40	3.98	2.17
2	50	4.43	2.60
2 1/2	65	5.12	2.83
3	80	5.47	3.35
4	100	6.97	4.33



Series 94 Electric Actuators


Standard Features (Sizes 1/2" – 3")

- Brushless, capacitor-run motors (AC models)
- Integral thermal overload protection with auto-reset (AC models)
- Permanently lubricated gear train
- Duty cycle 100% for high cycle applications
- Corrosion-proof/weatherproof NEMA 4X thermoplastic housing with stainless steel trim
- ISO bolt circle
- Two 1/2" NPT conduit ports prevent interference between control and power signals
- Compact design
- Declutchable manual override
- Standard travel-stop limit switches can simultaneously be used for indicator lights
- Visible position indicator

Options

- Extra limit switches
- Feedback potentiometer
- Heater and thermostat (to -40° F)
- Positioner: 4–20 mA or 0–10 Vdc input signal
- 4–20 mA output position transmitter
- Voltages: 220 Vac, 24 Vac, 12 Vac, 24 Vdc, 12 Vdc
- Mechanical brake eliminates seating oscillation

AC Wiring (For 115 Vac and 220 Vac only)

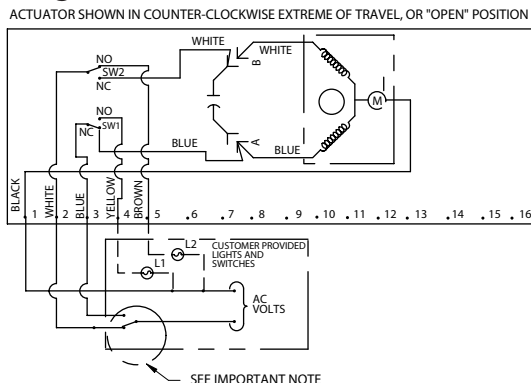


Electric Actuators

Specifications

Series 94: Motor Type – Reversing, 1/4 turn, single phase
 Sizes – A94, B94 for sizes 1/2" – 3" ball valves
 Torque – 150 to 300 in-lbs
 Voltage – 120 Vac, 50/60 Hz
 Amp Draw – For A94: .5 Amps
 For B94: .75 Amps
 Max Ambient Temp – 150° F
 Switches – Two single pole, double throw (15 Amp rating)

SERIES 94 ON
 TYPE 21
 BALL VALVES

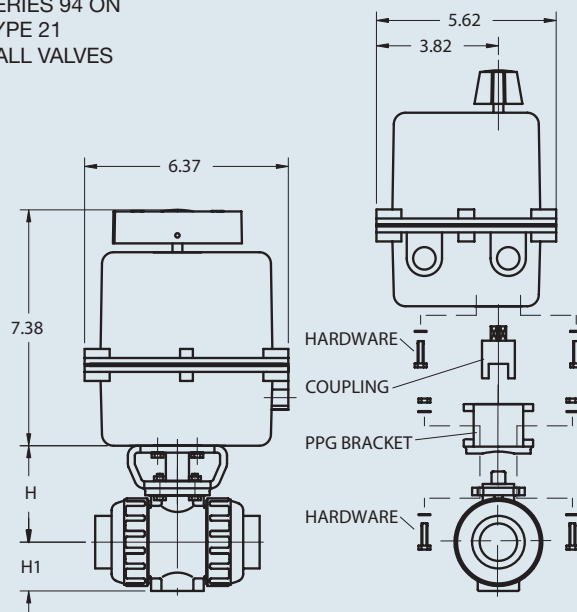

Engineering Data

Actuator Model	Torque (in-lbs)	Duty Cycle	Cycle Time (sec)	Weight (lbs)	Amp Draw					
					115 Vac	220 Vac	24 Vac	12 Vac	24 Vdc	12 Vdc
A94	150	100	5	3.5	0.50	0.8	4.0	2.0	4.0	2.0
B94	300	75	5	3.5	0.75	0.8	4.0	2.0	4.0	2.0

Duty cycle shown above is for 115 Vac at ambient temperature.

NOTE TO WIRING DIAGRAM:

1. EACH ACTUATOR MUST BE POWERED THROUGH ITS OWN INDIVIDUAL SWITCH CONTACTS TO AVOID CROSS FEED.
2. WIRING AS SHOWN IS FOR A94 AND B94 MOTOR.
3. MOTOR HAS A THERMAL PROTECTOR AS SHOWN BY (M) IN DIAGRAM. (115 AND 220 VAC MODEL).
4. IF 115 & 220 VAC MODELS ARE PLC DRIVEN, OUTPUT CONTACTS OF PLC SHOULD BE RATED AT A MINIMUM OF 1.5 TIMES REQUIRED INPUT VOLTAGE OF ACTUATOR.

Dimensions

NOMINAL SIZE		H	H1
INCHES	mm		
1/2	15	2.76	1.14
3/4	20	3.01	1.38
1	25	3.29	1.54
1 1/4	30	3.64	1.85
1 1/2	40	3.98	2.17
2	50	4.43	2.60
2 1/2	65	5.12	2.83
3	80	5.47	3.35

ASAHI/AMERICA

Rev. A 01-02

Electrically Actuated Multiport Valves



Series 92 on Multiport Ball Valve



Series 94 on Multiport Ball Valve

FOR FEATURES OF SERIES 92 ACTUATOR, SEE PAGE 19.
FOR FEATURES OF SERIES 94 ACTUATOR, SEE PAGE 20.


Dimensions (IN.) SERIES 92 ON MULTIPORT (1/2"-4")

NOMINAL SIZE		H	H ₁
INCHES	mm		
1/2	15	1.95	3.33
3/4	20	2.31	3.88
1	25	2.46	4.81
1 1/4	30	2.92	6.61
1 1/2	40	3.85	6.61
2	50	4.00	7.57
2 1/2	65	5.12	10.34
3	80	5.50	10.34
4	100	6.88	12.24

Dimensions (IN.) SERIES 94 ON MULTIPORT (1/2"-3")

NOMINAL SIZE		H	H ₁
INCHES	mm		
1/2	15	1.95	3.33
3/4	20	2.31	3.88
1	25	2.46	4.81
1 1/4	30	2.92	6.61
1 1/2	40	3.85	6.61
2	50	4.00	7.57
2 1/2	65	5.12	10.34
3	80	5.50	10.34

SERIES 92 ON
MULTIPORT
BALL VALVES
SIZES 1/2" - 4"

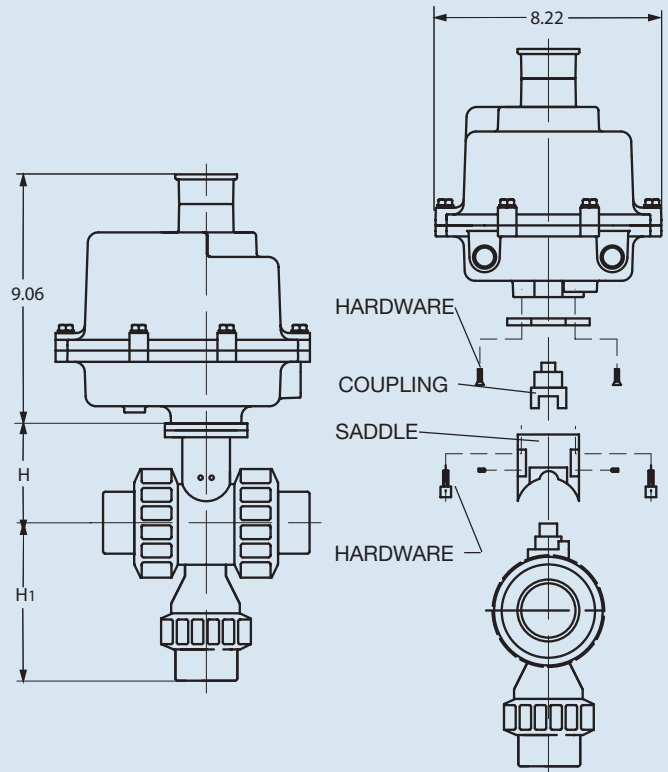

SERIES 94 ON
MULTIPORT
BALL VALVES
SIZES 1/2" - 3"

